



BREAKERS & ATTACHMENTS

CRUSHER MODEL

CCR 19-D



MTB DEMOLITION ATTACHMENTS

MTB Demolition Attachments are used for primary and secondary concrete demolition. There is a wide range of MTB Attachments for different demolition applications.


COMBI CRUSHER - CCR

CCR series demolition shears use patented, hoseless oil transfer technology. In this way, problems that may arise from the hose are prevented. Their jaw design is a combination of concrete cutters and concrete crusher jaws. The upper jaw can cut concrete and the lower jaw can crush concrete. The blades on the deeper part of the jaws can easily cut iron. They are suitable for the primary and secondary demolition operations of concrete structures. Demolition crushers also have a 360° rotation system that lets the user to operate at all angles and positions.



inan makina®
SANAYİ VE TİCARET A.Ş.



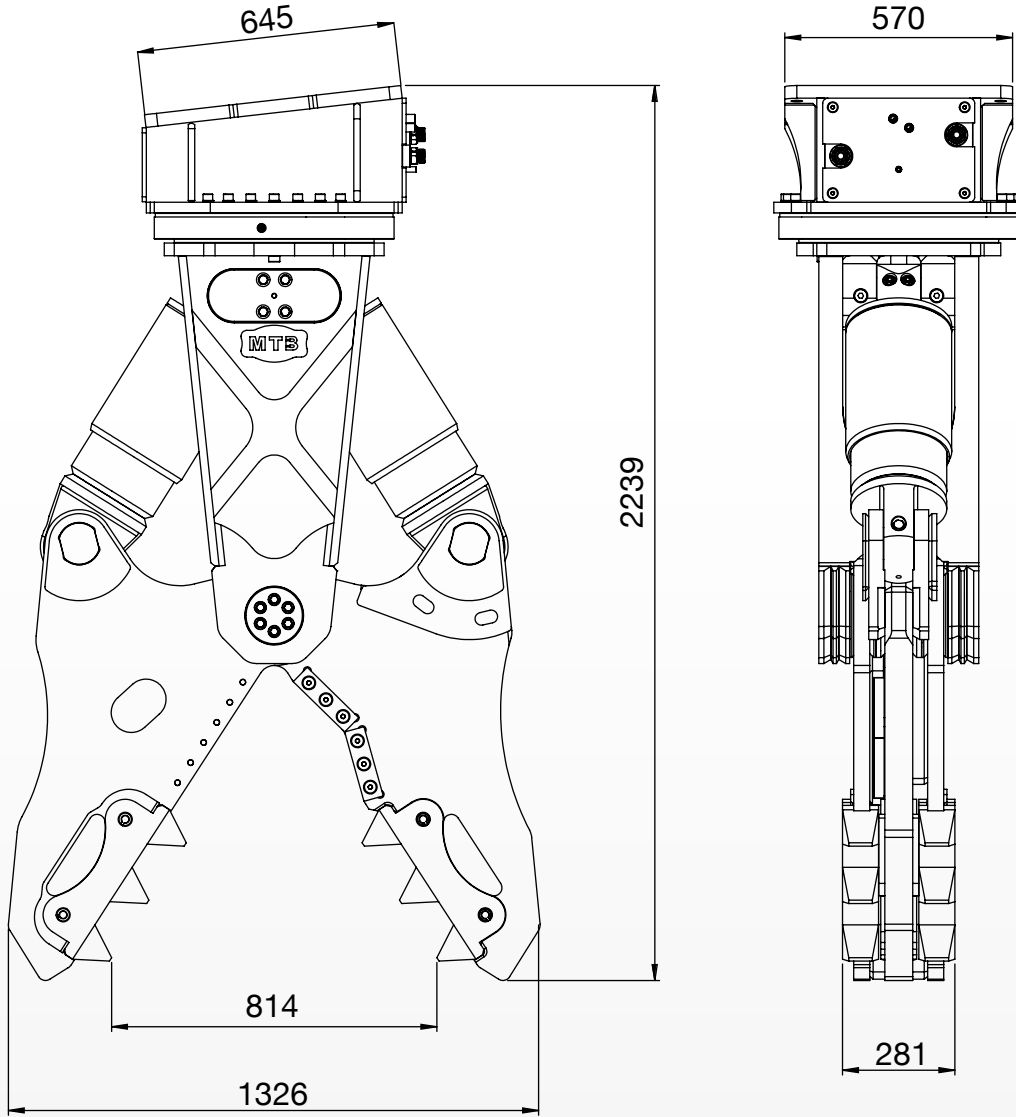

CCR 19-D

Working weight kg	1900 - 2150
Oil flow (Cylinder) lpm	200 - 250
Pressure (Cylinder) bar	350
Oil flow (Rotation) lpm	25 - 50
Pressure (Rotation) bar	150 - 160
Crushing force (Jaw tip) t	90
Cutting force t	275
Jaw opening mm	814
Jaw depth mm	815
Cutter length mm	2x180
Overall length mm	2239
Carrier weight t	25 - 40



Factory

Bahçelievler OSB Mh. 11. Cd. No: 4A
59510 Kapaklı / Tekirdağ - TÜRKİYE
+90 282 768 25 00

www.mtbbreakers.com - info@inanmakina.com



WARNING! The visuals and the information in this brochure are standard or optional depending on the version of the product.

İNAN MAKİNA A.Ş. saves the right to modify the values and designs shown in this brochure without notice.