



**BREAKERS & ATTACHMENTS**

**CRUSHER MODEL**

# CRS 04



## MTB DEMOLITION ATTACHMENTS

MTB Demolition Attachments are used for primary and secondary concrete demolition. There is a wide range of MTB Attachments for different demolition applications.



## CRUSHER - CRS

Their jaw design is more suitable for primary demolition operations such as; cutting columns and beams and floor demolition. The frontal part of the jaw is optimized for concrete demolition while the rear part can cut iron with ease.



**inan makina**®  
SANAYİ VE TİCARET A.Ş.



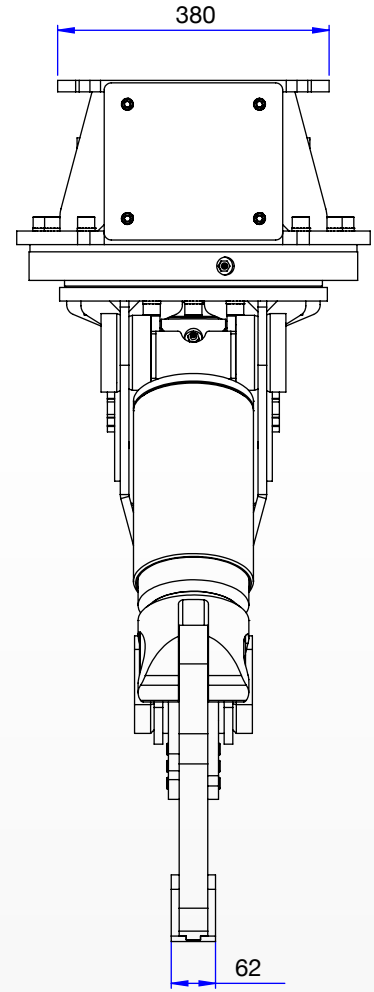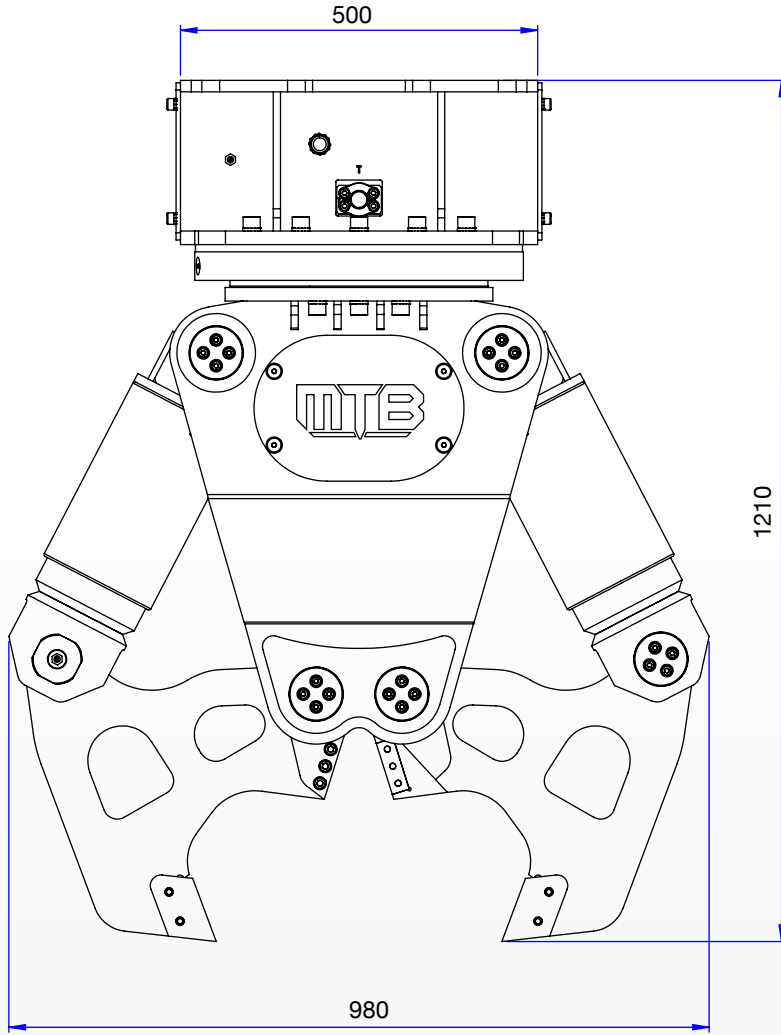

## CRS 04

Working weight	kg	450 - 525
Oil flow (Cylinder)	lpm	40 - 100
Pressure (Cylinder)	bar	200
Oil flow (Rotation)	lpm	10 - 20
Pressure (Rotation)	bar	110 - 120
Crushing force (Jaw tip)	t	42
Cutting force	t	142
Jaw opening	mm	400
Jaw depth	mm	330
Cutter length	mm	75
overall length	mm	1210
Carrier weight	t	5,5 - 11



### Factory

Bahçelievler OSB Mh. 11. Cd. No: 4A

59510 Kapaklı / Tekirdağ - TURKEY

+90 282 768 25 00

[www.mtbbreakers.com](http://www.mtbbreakers.com) - [info@inanmakina.com](mailto:info@inanmakina.com)



**inan makina®**  
SANAYİ VE TİCARET A.Ş.



**WARNING:** The visuals and the information in this brochure are standard or optional depending on the version of the product.

İNAN MAKİNA A.Ş. saves the right to modify the values and designs shown in this brochure without notice.