



BREAKERS & ATTACHMENTS

CRUSHER MODEL

CRS 20



MTB DEMOLITION ATTACHMENTS


MTB Demolition Attachments are used for primary and secondary concrete demolition. There is a wide range of MTB Attachments for different demolition applications.

CRUSHER - CRS

Their jaw design is more suitable for primary demolition operations such as; cutting columns and beams and floor demolition. The frontal part of the jaw is optimized for concrete demolition while the rear part can cut iron with ease.



TECHNICAL INFORMATION

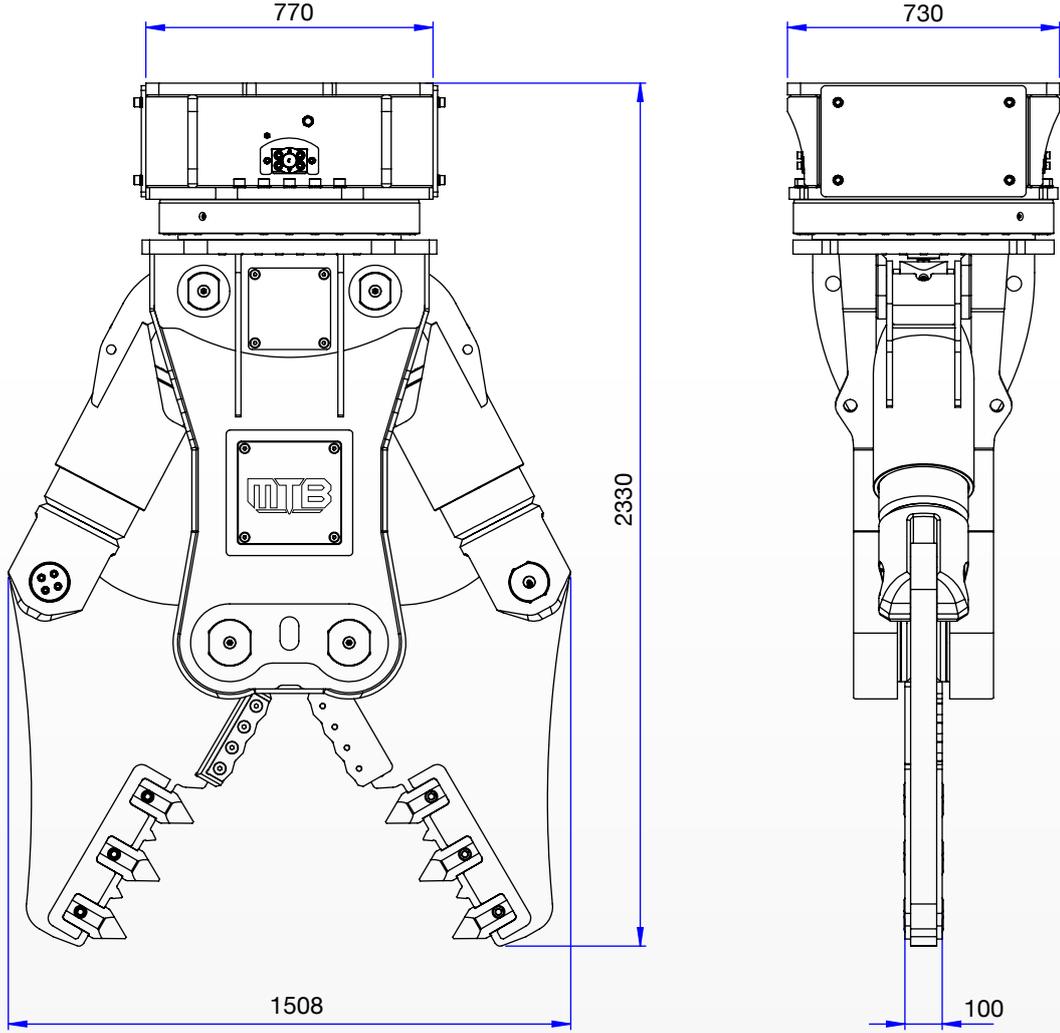

CRS 20

Working weight	kg	2425 - 2825
Oil flow (Cylinder)	lpm	200 - 250
Pressure (Cylinder)	bar	350
Oil flow (Rotation)	lpm	20 - 40
Pressure (Rotation)	bar	150 - 160
Crushing force (Jaw tip)	t	106
Cutting force	t	325
Jaw opening	mm	875
Jaw depth	mm	850
Cutter length	mm	250
overall length	mm	2330
Carrier weight	t	28 - 40

Rev. 01.03.24



Factory

Bahçelievler OSB Mh. 11. Cd. No: 4A
59510 Kapaklı / Tekirdağ - TURKEY
+90 282 768 25 00
www.mtbbreakers.com - info@inanmakina.com



WARNING! The visuals and the information in this brochure are standard or optional depending on the version of the product.

İNAN MAKİNA A.Ş. saves the right to modify the values and designs shown in this brochure without notice.