

## **DEMOLITION CRUSHER MODEL**

# **DCR 20**



### MTB DEMOLITION ATTACHMENTS

MTB Demolition Attachments are used for primary and secondary concrete demolition. There is a wide range of MTB Attachments for different demolition applications.

#### **DEMOLITION CRUSHER - DCR**

Their jaw design is a combination of concrete cutters and concrete crusher jaws. The upper jaw can cut concrete and the lower jaw can crush concrete. The blades on the deeper part of the jaws can easily cut iron. They are suitable for the primary and secondary demolition operations of concrete structures. Demolition crushers also have a 360° rotation system that lets the user to operate at all angles and positions.















## **TECHNICAL INFORMATION**

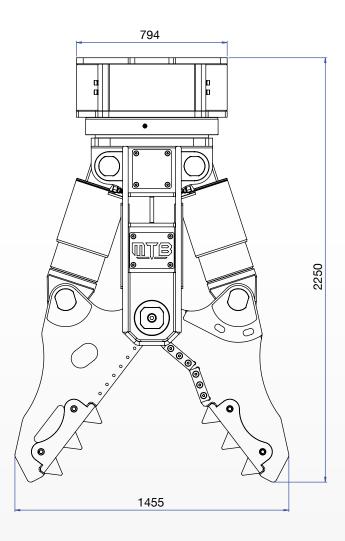

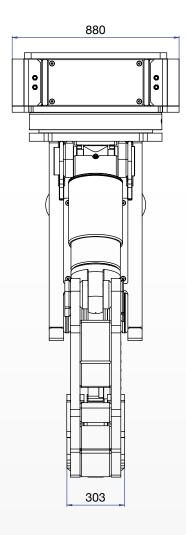

#### **DCR 20**

Working weight kg	2400 - 2800
Oil flow (Cylinder) Ipm	200 - 250
Pressure (Cylinder) bar	350
Oil flow (Rotation) Ipm	25 - 50
Pressure (Rotation) bar	150 - 160
Crushing force (Jaw tip) t	85
Cutting force t	315
Jaw opening mm	955
Jaw depth mm	920
Cutter length mm	2 x 180
Overall length mm	2250
Carrier weight t	28 - 50