

PULVERIZER MODEL

PLV 30



MTB DEMOLITION ATTACHMENTS

MTB Demolition Attachments are used for primary and secondary concrete demolition. There is a wide range of MTB Attachments for different demolition applications.

PULVERIZER - PLV

They are designed for secondary demolition works such as pulverizing concrete debris and separating the steel bars after the demolition of concrete structures. The steel from the concrete debris can be recycled with these attachments. MTB concrete crushers ensure that these operations are done quickly and safely. They can also be used for primary and secondary demolition operations of concrete structures.













TECHNICAL INFORMATION

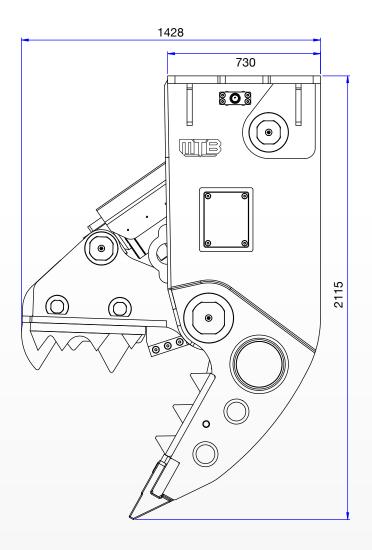

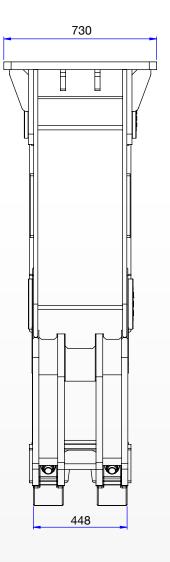

PLV 30

Working weight kg	2380 - 2780
Oil flow (Cylinder) Ipm	200 - 250
Pressure (Cylinder) bar	350
Oil flow (Rotation) Ipm	-
Pressure (Rotation) bar	-
Crushing force (Jaw tip) t	92
Cutting force t	336
Jaw opening mm	825
Jaw depth mm	790
Cutter length mm	180
Overall length mm	2115
Carrier weight t	28 - 40