



BREAKERS & ATTACHMENTS

PULVERIZER MODEL

PLV 30-R





MTB DEMOLITION ATTACHMENTS

MTB Demolition Attachments are used for primary and secondary concrete demolition. There is a wide range of MTB Attachments for different demolition applications.

PULVERIZER - PLV

They are designed for secondary demolition works such as pulverizing concrete debris and separating the steel bars after the demolition of concrete structures. The steel from the concrete debris can be recycled with these attachments. MTB concrete crushers ensure that these operations are done quickly and safely. They can also be used for primary and secondary demolition operations of concrete structures.



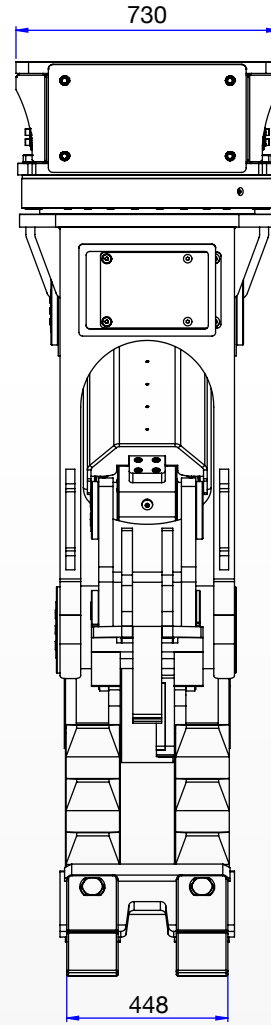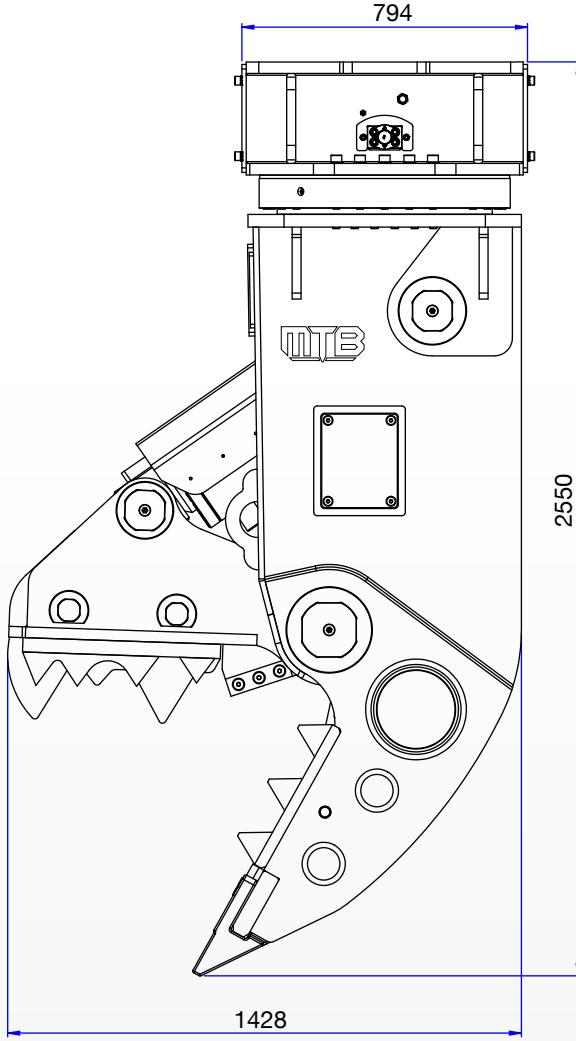

PLV 30-R

Working weight	kg	2985 - 3385
Oil flow (Cylinder)	lpm	200 - 250
Pressure (Cylinder)	bar	350
Oil flow (Rotation)	lpm	20 - 40
Pressure (Rotation)	bar	150 - 160
Crushing force (Jaw tip)	t	92
Cutting force	t	336
Jaw opening	mm	825
Jaw depth	mm	790
Cutter length	mm	180
Overall length	mm	2550
Carrier weight	t	28 - 40



Factory

Bahçelievler OSB Mh. 11. Cd. No: 4A

59510 Kapaklı / Tekirdağ - TURKEY

+90 282 768 25 00

www.mtbbreakers.com - info@inanmakina.com



inan makina®
SANAYİ VE TİCARET A.Ş.



WARNING! The visuals and the information in this brochure are standard or optional depending on the version of the product.

İNAN MAKİNA A.Ş. saves the right to modify the values and designs shown in this brochure without notice.